For Earth, For Life




KUBOTA BX SERIES

BX231 - BX261







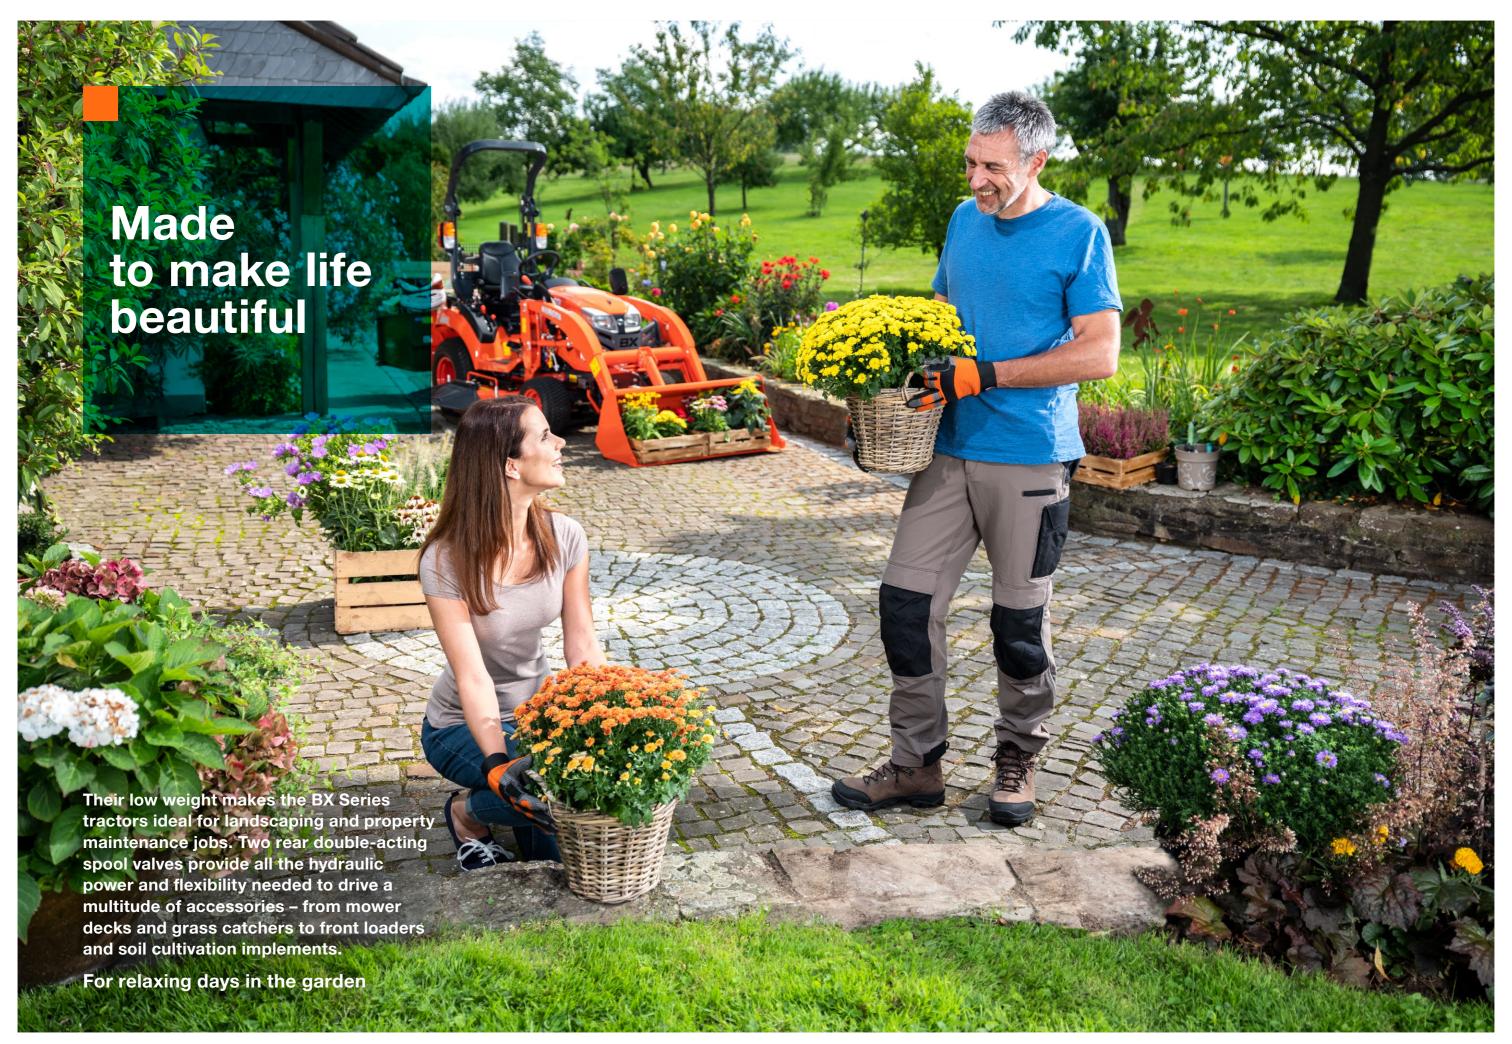



The maneuverable compact tractor

The compact BX231/261 is smaller than a normal tractor and easier to operate. Thanks to its high performance and versatility, it is also ideal for difficult and demanding gardening, landscaping and property maintenance tasks.







Always a reliable partner

High-performance and economical engines, robust hydrostatic transmission and an extremely durable frame construction allow maximum productivity. With the compact dimensions you can work effectively on small and angled areas and the low base weight preserves the lawns.



One engine, many positive features

Kubota is one of the world's leading manufacturers of diesel engines in this performance segment. The engines offer proven quality and reliability and are characterised by impressive power reserves. Even better: they are not only powerful, but also impress with their lower emissions, reduced fuel consumption and smooth running.

An engine with muscle power

The BX231/261 tractors are powered by the proven, high capacity Kubota engines. The BX231 has an economical 17 kW (23 hp); BX261 has a 19 kW (26 hp) diesel engine under the bonnet. This 3-cylinder workhorse offers remarkable performance for a tractor of this size – more than enough to handle your toughest tasks.

Rugged and durable

The bonnet and fenders made from hard-wearing metal will reliably withstand shocks, dents and other bruises to keep your BX tractor looking as good as it works, for years to come.



Did you know?

Did you know that Kubota produces its own engines and that Kubota is the global market leader for industrial diesel engines under 100 hp? You might be surprised to learn under which bonnets Kubota engines are at work. Top quality and efficiency are the main ingredients of this success.



The one-piece bonnet can be fully raised and all of the relevant components are accessible without tools. This makes daily maintenance a breeze.



Compact, gentle on the ground and maneuverable

The BX231/261 tractors have the physical dimensions of a standard lawn tractor and are impressively agile, even in the most confined spaces. Thanks to their compact size they are effective for small and angled areas; the low base weight is also gentle on sensitive lawns. But don't be fooled by their modest dimensions – these tractors have plenty of power and can handle a multitude of tasks and projects.

#Transmission





Created for maximum productivity

The BX231 and BX261 models are reliable partners when it comes to maintaining large parks, gardening and landscaping or municipal winter maintenance. Their robust hydrostatic transmission and extremely durable frame construction ensure maximum productivity.

Simply shift gear and take control

The hydrostatic transmission of the BX tractors enables fast and smooth forward and reverse speed and direction changes via two smooth-running foot pedals. To be possible to have only one pedal, the faulty operations are excluded and a safe working environment is quaranteed.

Effortlessly tackle large tasks Mowing large areas, when a const

Mowing large areas, when a constant speed is required, can be handled easily and comfortably with the cruise control, with which the BX tractors are equipped as standard. It ensures that the speed you set is automatically maintained at a constant level. This allows you to take your foot off the accelerator pedal and get the job done without stress.



The versatile BX tractors are simple to drive and maneuver. Even the most demanding mowing jobs can be carried out efficiently and precisely. As they smoothly maneuver between trees and other narrow places in the garden, the machines show that they are more than just normal garden tractors. A further advantage is that their compact size and light operating weight protect the lawn.



More control, more comfort, more space

Climb on and enjoy the ride – that's what the BX tractors are all about. With its easy-to-read displays, the instrument panel with a modern design provides all the information you need to operate your BX tractor safely and efficiently. A fully upholstered comfort seat, an adjustable steering wheel and the increased legroom of the operator platform ensure maximum productivity and comfort.

Spacious operator platform

The completely flat platform with the ergonomically mounted operating elements offer a lot of space and comfort

Comfortable seat

Fitted as standard, the mechanically sprung operator's seat with high backrest and adjustable armrests offers a high level of seating comfort for relaxed driving and working. If you seek even more comfort, then the optional deluxe air-suspended operator seat is the right choice for you. But you can also adapt the standard comfort seat to suit your stature and height. In combination with the other useful details, this allows you to complete your tasks in a relaxed and comfortable manner.

All information at a glance

The clearly designed instrument panel has easy-to-read displays for all the important information. This ensures trouble-free, safe and efficient operation of your tractor. One glance is all you need to see about the most important functions and the operating status of your tractor.





Individual steering wheel adjustment

The adjustable steering wheel can be easily adjusted to suit any operator, regardless of stature or height. This feature is particularly useful where tractors are used by multiple operators.

Ideal for low entrances

The tractors are equipped with a collapsible safety roll bar. This is a great advantage in situations where headroom is restricted, such as garages or sheds.

Protection and comfort, all year round

In rainy weather or during the winter, long working days on an open tractor are no walk in the park. For this reason, both models are also available in a cab version, making them suitable for the professional year-round use. The comfortable cab provides plenty of space, good noise insulation, excellent all-round visibility and powerful heating. Ventilation nozzles at the front and rear ensure good air circulation. Low entry heights are no problem for the cab tractor, either. With an overall height of less than 2 m, it can be used to drive into smaller garages or height-limited multi-story car parks.





Flexible deployment on any surface

With the optional front lift, these tractors provide three independent mounting spaces. This makes them even more flexible to use and reduces set up times. Thanks to a powerful rear linkage, you will be able to use all implements from Kubota's extensive range of attachments. What's more, their high ground clearance allows them to be used on areas where other compact tractors can't go.

Ample lifting power for versatile applications

The BX features a rugged, hydraulically adjustable 3-point Category I rear linkage. With a lifting capacity of 550 kg, it's tough enough to handle a wide variety of rear-mounted implements.

Year-round flexibility

The front PTO is driven directly by the engine. This provides you with three independent mounting spaces for a wide range of front attachments. As a result, setup times are reduced and you have great flexibility all year round. There is no need to dismantle the mid-mount mower to operate front attachments. This means, for example, that after mowing you can work with a front-mounted sweeper without needing to attach or remove implements.






Did you know?

Did you know that Kubota is not only one of the top 50 most recognised brands in Japan, but also one of the largest tractor manufacturers in the world? In 2014 alone, Kubota produced more than 180,000 tractors.

Generous ground clearance

You are often confronted with difficult terrain where stones, branches and other obstacles can make driving tricky. At other times, you find yourself having to negotiate curbs. No problem for the BX tractors. Thanks to the high ground clearance, these tractors let you drive confidently and without damage.



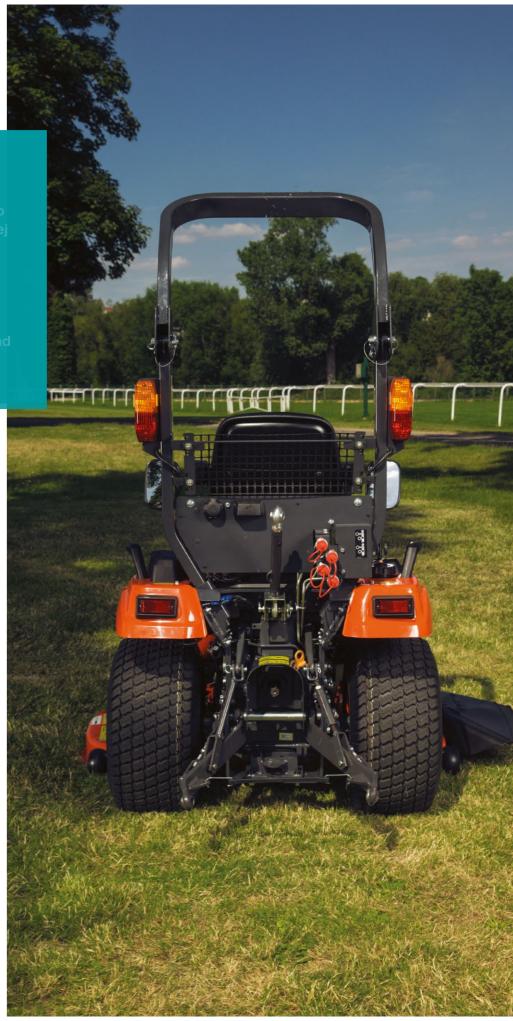

Perfectly coordinated tools

Whatever your job - transporting, moving or light tillage - there's always a BX Series attachment to make it faster and easier. The implements can be quickly and easily attached and removed so you can efficiently carry out other tasks. The exclusive "Easy-Over" mid-mount mower decks are a prime example of this.

Attached and removed in record time

Slide out the ramps and release

the anti-scalp wheels.

To satisfy your specific mowing requirements, the "Easy-Over" mid-mount mower decks for the BX tractors are available in 137 cm and 152 cm working widths. A great advantage is easy mounting and dismounting, which can be carried out very quickly. First slide out the integrated ramps and unlock the anti-scalp rear wheels. Then drive over the deck. Lock the rear deck lock and the one-touch universal joint lever. Now simply retract the ramps, raise the mower deck and get mowing!

Standard mower deck

The 3-blade mower deck provides a large cutting area so you can mow more grass in one pass. For the BX231/261, you can choose between a working width of 137 cm and 152 cm.

High ground clearance

The "Easy-Over" mid-mount mower deck has a ground clearance of 152.4 mm - more than any other mower in its class. This allows you to mow with the mounted mower effortlessly over obstacles.

Easy cutting height adjustment

Simply turn the easily accessible control dial to set the desired cutting height in 6 mm increments.

Drive over the mower deck.





Lock the deck in place with the

easy-to-use rear deck lock.

then set the anti-scalp wheels.



Couple the PTO shaft using the easy one-touch lever,



RCK48R-23BX-EU RCK54-23BX-EU-F RCK60B-23BX-EU-F RCK48-23BX-EU-F Mid-mount mower model Side discharge Rear discharge Side discharge Type Number of blades Mounting method Suspended-Linkage Self Balance **Cutting width** 1,219 1,524 25 –102 **Cutting height** mm Dial gauge Adjustment of cutting height



Durable shaft drive

The shaft drive of the BX231/261 transmits power smoothly from the intermediate axle PTO to the mid-mount mower deck. Unlike a belt drive, there is no slippage and maintenance is minimal.

Easy attachment and removal

The standard mower deck can be easily attached and removed too, saving you time and effort.









Retract the ramps, raise your deck and you're ready to go!



#Front loader



Robust, versatile front loader

Kubota developed the front loader especially for the BX tractors. It enables you to do the front loading quickly and productively. Thanks to tool-free mounting and dismounting, it's easy to switch between front loader work and other front loader attachments.

Rounded front loader swing arm

The rounded front loader swing arm perfectly complements the design of the bonnet. As well as creating a harmonious look, this design has tangible advantages as it gives you an optimal view of the front working area.

Protected hydraulic lines

On the BX the hydraulic lines have been integrated to the front loader swing arm. This solution provides two advantages: it protects the lines from damage and improves visibility.

Simple mounting and dismounting

The front loader has an integrated parking support that makes it easier to attach and remove.

Practical front protection

The elegant optional front protection feature can be folded down to make it easier to open the bonnet.



#Technical data

| Model | | BX231 | BX261 | |
|----------------------------------|---------------------------------|--|-----------------|--|
| Engine | | | | |
| Туре | | Liquid-cooled, 3-cylinder diesel | | |
| Model | | D902-E4-BX-3EU | D1005-E4-BX-3EU | |
| Engine gross | HP at 3200 rpm HP (kW) | 23.3 (17.1) | 25.5 (18.8) | |
| PTO horsepo | wer at 3200 rpm HP (kW) | 17.9 (13.2) | 19.7 (14.5) | |
| Displacemen | t cm ³ | 898 | 1,001 | |
| Fuel tank capacity | | 25 | | |
| Drive train | | | | |
| Transmission | | HST, two ranges | | |
| Drive method | | 2WD and 4WD selection | | |
| Brakes | | Wet disc | | |
| РТО | | Live independent, wet hydraulic clutch | | |
| Rear | | STD (540 rpm) | | |
| Mid | | STD (2,500 rpm) | | |
| Hydraulics | | | | |
| Pump output I/min | | 24 | | |
| 3-point hitch | | Category I | | |
| Lift capacity kg | | 550 | | |
| Steering | | Hydrostatic Power Steering | | |
| Tyre size | | | | |
| Front | | 18 × 8.5 –10 | | |
| Rear | | 26 × 12 –12 | | |
| Travelling spe | eeds at rated engine rpm (Turf) | | | |
| Forward km/h | | 0 – 13.5 | | |
| Reverse km/h | | 0 – 10.5 | | |
| Dimensions | | | | |
| Length with 3-point hitch mm | | 2,425 | | |
| Width (w/turf tyre) mm | | 1,145 | | |
| Height with ROPS mm | | 2,110 | | |
| Wheelbase mm | | 1,400 | | |
| Ground clearance (front axle) mm | | 225 | | |
| Tread | Front mm | 9 | 30 | |
| | Rear mm | 8 | 20 | |
| Turning radius (w/o brake) m | | 2.3 | | |
| Tractor weight kg | | 650 | | |

| Front loader model | LA243EC-1 | |
|---|-----------|-------|
| Max. lift height (to bucket pivot pin) mm | | 1,810 |
| Dumping clearance | mm | 1,333 |
| Dumping reach at max. lift height | mm | 735 |
| Max. dump angle | deg. | 45 |
| Reach with bucket on ground | mm | 1,390 |
| Bucket rollback angle | deg. | 29 |
| Digging depth | mm | 120 |
| Overall height in carrying position | mm | 990 |
| Bucket width | mm | 1,219 |

| | | LA243EC-1 |
|--|-------|-----------|
| Lift capacity (500 mm fwd., max. height) | 235 | |
| Breakout force (500 mm fwd.) | N | 4,410 |
| Raising time to full height w/o load | S | 3.5 |
| Lowering time w/o load | S | 2.7 |
| Bucket rollback time | S | 2.4 |
| Bucket dumping time | S | 1.7 |
| Rated flow | I/min | 14 |
| Lift cylinder bore diameter | mm | 40 |
| Tilt cylinder bore diameter | mm | 65 |
| Bucket capacity (struck) | m³ | 0.14 |

22 BX Series ———



Kubota (U.K.) Limited

Dormer Road Thame, Oxfordshire, OX9 3UN

http://www.kubota.co.uk

Every effort has been made to ensure that the contents of this publication were accurate and up-to-date at the time of going to press. All rights reserved. No part of this publication may be reproduced in any form by any means, without prior permission of Kubota. Kubota reserve the right as a manufacturer to amend and update any specification or performance information without notice, if required.

