



PRODUCT CATALOGUE.

INDUSTRY LEADING WARRANTY



INCLUDES SPINDLES & GEARBOXES

EXPERIENCED SERVICE & SUPPORT NETWORK

* T & Cs APPLY



MADE IN BRITAIN®

POWERS
PERFORMANCE.

From humble beginnings in New Zealand, to a world leader in Commercial Mowing - our success is driven by a passion to help customers find a better way.

We listen to how you use our products, designing with customer focused innovation to solve problems you encounter. The result? Mowing solutions which increase productivity, reduce maintenance and can be relied on day-afterday, for years of full time commercial use.



LONG
COMMERCIAL LIFE.



LOW TOTAL-COST-OF-OWNERSHIP.



EASE OF MAINTENANCE.



INTUITIVE TO USE.



INDUSTRY LEADING CUT PRESENTATION.



SERVICE THAT EXCEEDS EXPECTATIONS.







STRIKER FOR HULL KINGSTON ROVERS.



THE CUSTOMER.

Hull Kingston Rovers are a professional rugby league club in the Super League.

They have won five league championships and one Challenge Cup.

Anthony Brockwell is the Head Groundsman for Hull Kingston Rovers at Craven Park.



Hull Kingston Rovers needed:

- The ability to consistently deliver a high-performance cut and finish on premium turf
- Low cost of ownership to allow budget to be used in other pitch maintenance projects



Trimax delivers:

- Reliable mowers with low maintenance requirements and industry-leading uptime
- Low cost of ownership
- > Superior cut and finish on fine turf



Here's what Anthony says about Trimax:

"After booking a demonstration, Trimax came onsite and talked us through the Striker rotary mower. They left the machine with us, so we were able to get hold of the unit and really test it. Over the weekend of having it, it was a no brainer to use Trimax. It was a fantastic machine for what we needed it to do! We can now put that extra £1,200 that we would have spent on cylinder maintenance back into the pitch."

SNAKE FOR COTTINGHAM PARK GOLF & LEISURE CLUB.



THE CUSTOMER. Cottingham Park Golf & Leisure

Club is situated in Yorkshire, U.K. Established in 1994, it started out as an 18-hole golf course, but soon expanded to include holiday lodges, restaurant facilities, a health club, a gym, an equestrian section and a driving range. The 2008 acquisition of the neighbouring Skidby Lakes golf course made Cottingham Park a 36-hole facility. John Wiles is the Course Manager and a Cottingham Park Company Director.



Cottingham Park Golf and Leisure Club needed:

- > The ability to mow over difficult terrain without scalping
- > A versatile and reliable machine with minimal downtime
- Excellent aftersales support and service



Trimax delivers:

- Full-width rollers to produce an excellent striping effect and protect against scalping
- Independently articulating cutting decks to easily mow over contours
- An industry-leading 3-year warranty and local parts and service support



Here's what John says about Trimax:

"This is a very simple design, very well built. It just keeps out there cutting grass."

"In winter and autumn, when we stop using the cylinder mowers on the fairways we use the Snake to reduce the height of cut down to 20mm and we can still prepare and present the fairways, stripe and roll them over and top them down to a manageable level."





PROCUT FOR MOUNT KELLY.



THE CUSTOMER.

Mount Kelly in Tavistock, UK is a private, independent co-educational boarding school.

It sits on 140 acres of tendered and manicured school grounds and sports fields. Matt Stevens is the Head of Grounds Staff at Mount Kelly, and Bobby Skelton is the Sports Director.



Mount Kelly needed:

- To maintain the appearance and health of grass on the pitches and fields to provide excellent quality playing surfaces
- Equipment with low maintenance requirements to save time and labour
- Machinery that is easy and intuitive to operate while still achieving premium results



Trimax delivers:

- Low cost of ownership
- Full-width rollers capable of producing striping while minimising ground disruption
- > Simple cut height adjustment that can be done while in the field
- Design considerations for easy cleaning and maintenance access



Here's what Matt says about Trimax:

"The efficiency of the mower is excellent! Being wider than others I can cover more ground, saving time and fuel. Also the turn around time has been cut from previous attachments as the Procut is so easy to take on and off the tractor."

"It has improved the look of our pitches by a great amount. This is what I am most impressed by as it is the most important factor. The quality of cut that the Procut gives is outstanding. I haven't ever seen a mower that you can cut slighty longer grass than normal even in the rain and it doesn't drop a single bit of grass clippings and gives an excellent finish to the surface."

Here's what Bobby says about Trimax:

"The new mower has made a huge impact on keeping our large playing fields in excellent condition, a particular challenge at this time of year when lots of Cricket is being played and the grass is growing at its fastest. The new mower has allowed us to meet this challenge and our pitches look spectacular."

FLAILDEK FOR MARK ELEY GROUND MAINTENANCE.



THE CUSTOMER.

Mark Eley has been the owner and operator of **Mark Eley Ground Maintenance** since 2002.

Based in Neath, South Wales, he works across southern Wales and neighbouring areas of the UK.



Mark Eley Grounds Maintenance needed:

- Maximum reliability and minimal downtime in full-time commercial operations
- The versatility to cut fine turf in village commons and long grass in verges and parks
- Low cost of ownership and a quick return on investment



Trimax delivers:

- Easy service and maintenance
- Inexpensive spare parts that are readily and locally available
- Maximum versatility with Trimax's unique converter to deliver an excellent finish on both long and short grass
- Able to fit on a compact tractor to fit in tight spaces



Here's what Mark says about Trimax:

"They've never met their match. Whatever I put them into they handle. I'm always impressed with how good they are. These mowers never clog, even when cutting long grass in wet weather. They always leave a superb finish."

"They are bombproof and will handle anything. They're well made, easy to operate and easy to service. There's nothing to match the Trimax machines. As I like to say 'The colour is red. The future is Trimax!"





FORCE FOR SHILLINGHAM VINEYARD.



THE CUSTOMER.

Shillingham Vineyard, located in East Cornwall, U.K., is currently in its early stages of development.

Spanning 50 acres, the vineyard began planting five grape varieties in 2021.

Operator, Alexander Ramsden, recently upgraded his Trimax Warlord to a Force.



Shillingham Vineyard needed:

- A reliable and versatile machine capable of mulching and mowing
- The capacity to mulch large prunings up to 80-90 cm in length to a fine mulch
- Able to manoeuvre in between the rows of vines



Trimax delivers:

- A robust, versatile multitool mower and mulcher
- The ability to mow and mulch prunings up to 90mm in diameter in a single pass
- A reliable mower with zero-maintenance features, including auto belt tensioning and maintenance-free roller bearings
- A compact mower, with various configurations, suitable for attachment to compact tractors.



Here's what Alexander Ramsden says about Trimax:

"This Force is a nice, compact, solid build. We primarily use it for incorporating the prunings, some of which are up to 80-90cm in length, back into the soil. It's important that we get a really fine mulch and that's where the Trimax comes in! It completely eliminates any of the large prunings in the alleyways. We also use it to keep control of the grass in the summer months. If you are working around vineyards, orchards or tight spaces, I would say go for the Force, it's a really reliable piece of kit"

PEGASUS FOR **STEWART BULLARD** & **SON**.



THE CUSTOMER.

Stewart Bullard & Son is based

in Hertfordshire U.K.

Established in 1990, the company has been working with local authorities for over 35 years providing high quality grounds maintenance.



Stewart Bullard & Son needed:

- The ability to mow wide areas, like parks, sports fields and recreation grounds quickly and efficiently
- A mower that could be easily transported between sites on roads and in public spaces



THE VALUE.

Trimax delivers:

- Effective mowing at higher speeds and with wider cut widths to maximise productivity
- Quick, efficient and safe transportation between sites: the Multi-Lift System (MLS) allows all three decks to be easily lifted for road transport.



THE RESULT.

Here's what Ellie Bullard from Bullard & Son says about Trimax:

"The S5 is so nimble and efficient. I use it on larger areas like school playing fields and it manoeuvres really well around obstacles like trees and goal posts"

"I love the Multi-Lift System, it's so easy to use and enables me to get into tighter spaces I couldn't before".


































WEBELIEVE THAT WHEN PEOPLE COME TOGETHER, **GREAT THINGS CAN HAPPEN!**

That's why we've created the **Trimax Owners & Operator Club.**

This Facebook group is a community for Trimax Operators to share mower insights, ask for help or post content that only other operators would understand (because let's face it, talking about clip dispersal at a party isn't a popular subject!).

There will be updates on Trimax events in your area, free tickets to tradeshows, and club merch giveaways. If you're a **Trimax Owner** or **Operator**, this is the support group that you never knew you needed.

SEE YOU ON THE INSIDE!

GET THE MOST OUT OF YOUR TRIMAX -**JOIN THE CLUB!**





ROTARY MOWERS.

FLAIL MOWERS.





PROCUT/S5 FM



PROCUT/S5 SR



STEALTH/S3



STEALTH/S3 SR







EGASUS SS SR





EZEEMOW/FX





TRIMAX STRIKER

Trimax STRIKER is a multi-spindled rotary mower with extremely low maintenance requirements and is ideal for use on compact tractors.

The Trimax Striker is designed to give a high cut quality and an excellent spread of clippings. Highly versatile, the Striker is capable of mowing grass 10 to 100mm. With an enclosed cutting chamber and a downward rear dispersion of clippings, the Striker has surpassed international safety standards making it one of the safest mowers on the market for use in public spaces.

Fitted with Trimax's exclusive LazerBladez™, the Striker can produce a cut and finish to rival that of a cylinder mower and is ideal for educational and sports facilities where presentation is key!

TALK TO US TODAY ABOUT THE CAPABILITIES OF STRIKER IN YOUR ENVIRONMENT.







| SPECIFICATIONS | 150 | 190 |
|-----------------------|----------------------|----------------------|
| Cutting Width | 1.46m (4' 9½") | 1.94m (6' 4½") |
| Overall Width | 1.56m (5' 1½") | 2.04m (6' 8½") |
| Overall Length | 1.16m (3' 9½") | 1.16m (3' 9½") |
| Height | 0.83m (2' 8½") | 0.83m (2' 8½") |
| Cut Height Range | 10 - 100mm (¾" - 4") | 10 - 100mm (¾" - 4") |
| No. of Blade Spindles | 3 | 4 |
| Approx. Weight | 322kg (710lbs) | 400kg (882lbs) |
| Min PTO Output | 25hp | 30hp |
| | | |

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



We can now mow with confidence when the grass is wet, knowing it won't clog the machine up. As well as doing a great job, the machine is also a

CHRIS PARRY | Loughborough Endowed Grammer School, UK

KEY APPLICATIONS.

✓ School & Sports Fields
✓ Golf & Country Club
✓ Lifestyle & Estates

WHAT'S NEW ON STRIKER

The Striker was originally designed as a compact solution for sports turf, especially for grounds maintenance for local football and cricket clubs. It features a simpler pan construction than the ProCut and includes maintenance-free ball bearing spindles.





PRODUCT FEATURES.



LOW COST OF OWNERSHIP

With only 4 grease points on the mower and with robust sealed spindles, the Trimax Striker has incredibly low maintenance requirements.



SAFETY FOR PUBLIC PLACES

Striker exceeds international safety standards, and can be used with confidence in public spaces, school sports fields and confined areas.



LAZERBLADEZ™

Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



ADVANCED ENGINEERING

Trimax's meticulous design process combined with bespoke, innovative manufacturing technologies produce the most accurate rotary cutting in the market.



STRIPING CAPABLE

Fitted with full width front and rear rollers, the Striker can produce striped patterned turf for those spaces where presentation is key.



ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.



COMPACT TRACTOR SUITABLE

Able to be paired with tractors as low as 25hp, the Striker is perfect for smaller budgets and compact



✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.





TRIMAX PROCUT/S5

A highly versatile roller mower, the PROCUT SERIES 5 is a multi-spindled roller mower designed to give a high cut quality and a great spread of clippings.

The ProCut has been a successful part of the Trimax range for over 30 years. Mowing parks, reserves, school grounds, sports fields and golf courses around the world - From the grounds of Windsor Castle to your local community sports fields.

The ProCut Series 5, released in 2023 is excellence refined. The Procut S5 builds on the market leading cut and spread quality of the previous series whilst removing all daily maintenance requirements making it the perfect solution for a variety of commercial environments.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 IN YOUR ENVIRONMENT.







| SPECIFICATIONS | 178 | 210 | 237 | 290 |
|--------------------------|--|---------------------------|---------------------------|---------------------------|
| Cutting Width | 1.74m (5' 8 ½") | 2.06m (6' 9") | 2.32m (7' 7") | 2.89m (9' 6") |
| Overall Width | 1.89m (6' 2 ½") | 2.21m (7' 3") | 2.47m (8'1") | 3.04m (10') |
| Overall Length | 1.44m (4' 9") | 1.51m (4' 11 ½") | 1.44m (4' 9") | 1.44m (4' 9") |
| Height | 1.08m (3' 6 ½") | 1.08m (3' 6 ½") | 1.08m (3' 6 ½") | 1.08m (3' 6 ½") |
| Cut Height Range | 10 - 110mm (³ / ₈ " - 4 ¹ / ₃ ") | 10 - 110mm (¾" - 4 ¼") | 10 - 110mm (¾" - 4 ¼") | 10 - 110mm (¾" - 4 ¼") |
| No. of Blade Spindles | 3 | 3 | 4 | 5 |
| Approx. Weight | 492kg (1085lbs) | 543kg (1197lbs) | 605kg (1334lbs) | 707kg (1559lbs) |
| Min PTO Output | 35hp | 40hp | 45hp | 55hp |
| | | | | |

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



We couldn't be happier with our 19 year old ProCut! Since purchasing the mower we haven't had any problems or downtime - it just seems to keep going and going. The presentation is great and we often receive comments on how good the grass looks. KEN BURNINGHAM | Woodside Golf Club, UK

KEY APPLICATIONS.

✓ Municipal & Contractors
✓ School & Sports Fields
✓ Turf
✓ Golf & Country Clubs
✓ Lifestyle & Estates

WHAT'S NEW ON PROCUT/S5

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, more consistent cut in heavy conditions.



PRODUCT FEATURES.



TITAN ROLLER BEARING SYSTEM The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



AUTOMATIC BELT TENSIONING Removes the need for belt adjustments and improves drive to the spindles and blades.





LAZERBLADEZ" Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



LOW MAINTENANCE

Zero daily maintenance. Spindles, roller bearings and auto-belt tensioning are maintenance-free.



STEADFAST SEALED SPINDLES We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



BELT CAVITY DUAL WASH FLAPS Provides easy access for removal of grass and drainage of water from belt chamber.



PRECISE HEIGHT ADJUSTMENT Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



ROLLER SCRAPERS Cleans rollers and reduces clumping in wet conditions.



FULL WIDTH ROLLERS Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aids in striping.



TECHNOLOGY Spindle height is perfectly aligned providing the most accurate cut possible.



STAND ON COVERS Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing and reduces side channel wear. **✓ LIGHTING KIT WITH**

STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and tools. **✓ NEXABLADES**

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ OUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut. **✓** SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

▼ TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.







TRIMAX PROCUT/S5 FM

The front mounted version of the ever-popular rear linkage Trimax PROCUT.

The Trimax ProCut FM is a robust machine engineered to withstand everyday use in the toughest commercial environments yet will deliver a clean cut - every time. In operation, the front-mounted ProCut Series 5 rides on the ground on its front wheels and rear roller. The front castor wheels and rear roller follow ground contours allowing easy manoeuvrability and prevent scalping. With out-front mowing the need for the operator to look behind is reduced and the tractor wheels do not flatten the uncut grass.

| SPECIFICATIONS | 178 | 210 | 237 | 290 |
|--------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Cutting Width | 1.74m (5' 8 ½") | 2.06m (6' 9") | 2.32m (7' 7") | 2.89m (9' 6") |
| Overall Width | 1.91m (6' 3") | 2.22m (7' 3 ½") | 2.48m (8' 11/2") | 3.05m (10' ½") |
| Overall Length | 1.65m (5' 5") | 1.72m (5' 8") | 1.65m (5' 5") | 1.65m (5' ½") |
| Height | 1.08m (3' 6 ½") | 1.08m (3' 6 ½") | 1.08m (3′ 6 ½″) | 1.08m (3' 6 ½") |
| Cut Height Range | 10 - 110mm (¾" - 4 ¼") | 10 - 110mm (¾" - 4 ⅓") | 10 - 110mm (¾" - 4 ⅓") | 10 - 110mm (¾" - 4 ¼") |
| No. of Blade Spindles | 3 | 3 | 4 | 5 |
| Approx. Weight | 569kg (1254lbs) | 616kg (1358lbs) | 675kg (1488lbs) | 770kg (1697lbs) |

⁴⁰hp *Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

Min PTO Output 35hp

KEY APPLICATIONS.

✓ Municipal & Contractors ✓ School & Sport Fields ✓ Golf & Country Clubs ✓ Horticulture ✓ Aviation ✓ Racecourses

WHAT'S NEW ON PROCUT/S5 FM

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, more consistent cut in heavy conditions.



PRODUCT FEATURES.



TITAN ROLLER BEARING SYSTEM The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



Removes the need for belt adjustments and improves drive to the spindles and blades.



LAZERBLADEZ™ Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



LOW MAINTENANCE Zero daily maintenance. Spindles, roller bearings and auto-belt tensioning are maintenance-free.



STEADFAST SEALED SPINDLES We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



BELT CAVITY DUAL WASH FLAPS Provides easy access for removal of grass and drainage of water from belt chamber.



PRECISE HEIGHT ADJUSTMENT Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



ROLLER SCRAPERS Cleans rollers and reduces clumping in wet conditions.



FULL WIDTH ROLLER Full width roller minimises scalping in undulating conditions and aids in striping.



TECHNOLOGY Spindle height is perfectly aligned providing the most accurate cut possible.

ACCURATE SPINDLE SETTING



STAND ON COVERS Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

▼ TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 FM IN YOUR ENVIRONMENT.





TRIMAX PROCUT/S5 SR

The original ProCut found phenomenal success in long grass applications due to its rigid construction, cut quality and manoeuvrability. With the PROCUT S5 SR we've taken this to another level.

The Single Roller ProCut S5 is a long grass mower that provides a market leading cut and finish. Engineered with a low body profile and increased under deck clearance it provides excellent clipping distribution without any daily maintenance requirements.

Built with industry leading strength and durability, this is the machine you need for any commercial long grass applications.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 SR IN YOUR ENVIRONMENT.







| SPECIFICATIONS | 178 | 210 | 237 | 290 |
|--------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Cutting Width | 1.74m (5' 8 ½") | 2.06m (6' 9") | 2.32m (7' 7") | 2.89m (9' 6") |
| Overall Width | 1.91m (6' 3") | 2.22m (7' 3 ½") | 2.48m (8' 1 ½") | 3.05m (10' ½") |
| Overall Length | 1.36m (4' 5") | 1.43m (4' 8") | 1.36m (4' 5") | 1.36m (4' 5") |
| Height | 1.08m (3' 6 ½") | 1.08m (3' 6 ½") | 1.08m (3' 6 ½") | 1.08m (3′ 6 ½″) |
| Cut Height Range | 10 - 110mm (¾" - 4 ¼") | 10 - 110mm (¾" - 4 ⅓") | 10 - 110mm (¾" - 4 ⅓") | 10 - 110mm (¾" - 4 ¼") |
| No. of Blade Spindles | 3 | 3 | 4 | 5 |
| Approx. Weight | 462kg (1019lbs) | 509kg (1122lbs) | 568kg (1252lbs) | 663kg (1462lbs) |
| Min PTO Output | 35hp | 40hp | 45hp | 55hp |
| | | | | |

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

The ProCut is over and above what we ever expected. We knew we needed more than just a slasher, the fine cut and even dispersion of the ProCut leaves

DALE COOK | Copelands Estate, Warragul, VIC, AUSTRALIA

KEY APPLICATIONS.

✓ Municipal & Contractors
✓ Horticulture
✓ Aviation
✓ Racecourses
✓ Aviation
✓ Lifestyle & Estates

WHAT'S NEW ON PROCUT/S5 SR

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, more consistent cut in heavy conditions.



PRODUCT FEATURES.



The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



TITAN ROLLER BEARING SYSTEM AUTOMATIC BELT TENSIONING Removes the need for belt adjustments and improves drive to the spindles and blades.



LAZERBLADEZ" Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



LOW MAINTENANCE Zero daily maintenance. Spindles, roller bearings and auto-belt tensioning are maintenance-free.



STEADFAST SEALED SPINDLES We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



BELT CAVITY DUAL WASH FLAPS Provides easy access for removal of grass and drainage of water from belt chamber.



PRECISE HEIGHT ADJUSTMENT Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations



ROLLER SCRAPER Cleans roller and reduces clumping in wet conditions.



FULL WIDTH ROLLERS Full width roller minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aids in striping.



ACCURATE SPINDLE SETTING TECHNOLOGY Spindle height is perfectly aligned providing the most accurate cut possible.



STAND ON COVERS Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



STORAGE BRACKET LED road lights, safety triangle, and

bracket for storage box. **✓ STORAGE BOX**

Easy access to spare parts and tools.

✓ QUATTRO BLADE SYSTEM

per spindle for a finer cut. **✓ SERVICE KIT**

Full set of blades, bolts and belts for a quick routine service.

▼ TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.





TRIMAX STEALTH/S3

The STEALTH SERIES 3 has been designed to give a higher quality of cut, operate in a wider range of conditions, be safer, more robust, easier to operate and take less time to maintain than any previous Stealth.

Backed by 30 years' of experience in market, the concept of Stealth Series 3 was born from the demand of our Australian customers for a mower that was more versatile in terms of long grass performance and more user friendly for both the operator and the workshop.

Backed by our industry leading 3-year warranty and our parts and technical support team, we know the Stealth Series 3 to be the best linkage wing mower for passive and active turf in the market.

TALK TO US TODAY ABOUT THE CAPABILITIES OF STEALTH SERIES 3 IN YOUR ENVIRONMENT.

SPECIFICATIONS 340 **Cutting Width** 3.4m (11' 2") **Overall Width** 3.55m (11' 8") 2.42m (7' 11") **Transport Width** 1.63m (5' 4") **Overall Length** Height (wings up) 1.21m (3' 11½") **Cut Height Range** 10 - 90mm (3/11 - 31/211) No. of Blade Spindles 5 Approx. Weight 940kg (2070lbs)

⁷⁰hp *Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



Min PTO Output

We're mowing 7 hours a day and getting large areas done quickly. It's easily manoeuvrable and the contouring following ability of the wings and the ability to fold them up with an in-cab transport lock is a huge advantage. JOHN ROSNELL | Springbrook Wholesale Nursery, Gold Coast QLD

KEY APPLICATIONS.

✓ Municipal & Contractors
✓ School & Sports Fields
✓ Racecourses
✓ Aviation
✓ Lifestyle & Estates

WHAT'S NEW ON STEALTH/S3

We've reduced the need for greasing through the introduction of new features such as SteadFast maintenancefree spindles and composite maintenance-free bushes. Stealth wing locks can now be operated from inside the tractor cab. Modifications have been made to the cutting chamber and the baffle design for improved cut quality and easy cleaning.

PRODUCT FEATURES.



LOCTEK

A stubless roller bearing system for vastly improved roller retention. alignment, bearing life and minimal maintenance.



GREATER MOWING VERSATILITY

The improved cutting chamber and baffle design directs airflow from the blades out and over the rear roller for a better cut and spread.



ANTI-WEAR SKIDS

Anti-wear skids reduce wear on side channels when operating in rough or uneven terrain.




LOW MAINTENANCE

Reduced greasing requirements mean operators can spend more time mowing and less on



EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and



LAZERBLADEZ™

Available in up-lift and flat formation Cleans rollers and reduces clumping to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings and deck.



SERVICE STANDS

Designed with safety in mind, the Stealth Series 3 can come with lockable service stands which hold the mower up to assist with maintenance.



ROLLER SCRAPERS

in wet conditions.

*OPTIONAL FEATURES.

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and tools. **✓ QUATTRO BLADES**

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

▼ TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.





TRIMAX STEALTH S3 SR

The Trimax STEALTH SR combines the cut quality, safety, robustness, decreased maintenance time, and easy operation of STEALTH SERIES 3 with enhanced performance in long grass.

With even more versatility than the Stealth Series 3 for long grass applications, the Stealth SR is purpose-built for an excellent cut for grass up to 500mm. The cutting chamber and baffle design are optimised to provide a better finish and spread at higher cut heights.

New and improved design features make the Stealth SR safer, more operator friendly, and easier to maintain than ever.



5

No. of Blade Spindles

Approx. Weight

KEY APPLICATIONS.

✓ Passive Turf & Open Space ✓ Municipal & Contractors ✓ Racecourses ✓ Aviation ✓ Horticulture ✓ Lifestyle & Estates

WHAT'S NEW ON STEALTH/S3 SR

The Stealth SR incorporates all the new features of the Stealth S3. An anti-scalp roller on the front of the main mowing deck and bubble rollers on the wings are added to protect against scalping over contours.



PRODUCT FEATURES.



LOCTEK

A stubless roller bearing system for vastly improved roller retention. alignment, bearing life and minimal maintenance.



ANTI-SCALP ROLLER

A raised front roller provides anti-scalp protection for your turf without impacting long grass performance.



IN-CAB UNLOCK SYSTEM

Unlock the mower wings' transport lock from the convenience of the tractor seat using the tractor's hydraulic control lever.



LONG GRASS PERFORMANCE

Designed to mow grass up to 500mm high and achieve the quality to suit mowing requirements, the cut you expect from Trimax.



EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.




LOW MAINTENANCE

Reduced greasing requirements mean operators can spend more time mowing and less on maintenance.



LAZERBLADEZ™

Available in up-lift and flat formation Cleans roller and reduces clumping in unique tilt forward design minimises hang back in tough conditions.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height Designed with safety in mind, the indicators allow the easy adjustment Stealth Series 3 can come with of cut heights without having to raise or lower the wings and deck.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and servicing.



ROLLER SCRAPER

wet conditions.



SERVICE STANDS

lockable service stands which hold the mower up to assist with maintenance.

OPTIONAL FEATURES.

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and tools. **✓ QUATTRO BLADE SYSTEM**

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

▼ TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.



900kg (1984lbs)



TALK TO US TODAY ABOUT THE CAPABILITIES OF STEALTH SERIES 3 SR IN YOUR ENVIRONMENT.



TRIMAX SNAKE/S3

The Trimax Snake sets the standard for trailed rotary mowing, trusted by many prestigious golf courses and turf farms worldwide.

Studied by the Sports Turf Institute of New Zealand, the Trimax cutting system delivers cut quality comparable to cylinder mowers, while offering the versatility and reliability of Trimax's renowned rotary design.

Now, with zero daily maintenance, the Snake S3 makes operations even more efficient for turf professionals. The Snake S3 features the Titan roller bearing system and maintenance-free wheel hubs, which together eliminate the need for daily greasing. These innovations further reduce the cost of ownership allowing owners and operators to focus on what matters most – mowing.

Backed by Trimax's industry-leading 3-year warranty, the

Snake S3 redefines productivity and operational efficiency.

TALK TO US TODAY ABOUT THE CAPABILITIES

OF SNAKE SERIES 3 IN YOUR ENVIRONMENT.

| SPECIFICATIONS | 320 | 400 |
|-----------------------|----------------------|----------------------|
| Cutting Width | 3.20m (10' 7") | 4.00m (13' 1") |
| Overall Width | 3.36m (11' 1") | 4.12m (13' 6") |
| Overall Length | 3.60m (11' 10") | 3.60m (11' 10") |
| Transport Width | 2.14m (7' 1/4") | 2.14m (7' 1/4") |
| Transport Height | 1.86m (6' 1") | 2.24m (7' 4") |
| Cut Height Range | 10 - 100mm (¾" - 4") | 10 - 100mm (¾" - 4") |
| No. of Blade Spindles | 9 | 11 |
| Approx. Weight | 1350kg (2976lbs) | 1480kg (3258lbs) |
| Min PTO Output | 35hp | 45hp |
| | | |

 $[\]hbox{*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain}$



It's one of my favourite mowers. Maintenance is an absolute breeze and the service from Trimax has been brilliant. I would recommend this mower to any country club or golf course.

- SIMON ASKEY | Head Green Keeper, Whangamata Golf Club

KEY APPLICATIONS.

- ✓ Golf Courses (Roughs & Fairways)
 ✓ Municipal & Contractors
 ✓ Turf
 ✓ School & Sports Fields
- ✓ Lifestyle & Estates

WHAT'S NEW ON SNAKE/S3

The Snake S3 builds on the Snake legacy with Trimax Titan roller bearings and maintenance-free wheel hubs for zero daily maintenance. New features also include height adjustment collars, stand-on covers, and removable blade beams for easy operation—letting turf professionals focus on exceptional results.



PRODUCT FEATURES.



TITAN ROLLER BEARING SYSTEMThe Trimax Titan roller bearing

The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



ARTICULATION ABILITY

With three articulating decks the Snake has the ability to provide a consistent cut when contours are present.



ZERO TURN

Allows continuous cutting while turning sharply for maximum productivity.



ZERO DAILY MAINTENANCE

Implementation of the Trimax Titan roller bearing system and maintenance-free wheel hubs results in no daily maintenance.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions, allowing for mowing over kerbsides and bunkers, while leaving a premium striped finish.



EASE OF USE

The Snake's compact design allows easy towing, new collars simplify height adjustment, and removable blade beams ensure easy blade changes.



Automatic belt tensioners eliminate the need for belt adjustments and provides consistent drive to the spindles and blades.



QUIKLIFT

calping QuikLIFT enables decks to be raised owing for slightly for traversing paths without ounkers, the need to disengage the PTO.



LAZERBLADEZ™

LazerBladez offer a superior finish with a cost-efficient design, as only the fling-tip needs replacing. Available in uplift and flat formations, their tilt-forward design minimizes hang-back in tough conditions.



✓ 5 YEAR EXTENDED WARRANTY

Increase the standard three-year warranty up to a five-year extended warranty for total peace of mind. T&C's apply.

✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing and reduces side channel wear.

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ ELECTRIC UNLOCK

Unlocks decks electronically from the tractor seat.

✓ MULTI LIFT SYSTEM

Five different lift functions to adjust mowing widths when required.

✓ MUDGUARDS, LIGHTS, & CHAINS

Add LED tail light clusters, safety chains, and transport wheel mudguards for increased safety during road transportation.

✓ LEAF MULCH KIT

Save on purchasing dedicated leaf blowing and collection units with the Snake Mulch Kit.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

▼ TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.

✓ TRIMAX CONNECT

A free app available when Trimax Multi-Lift System (MLS) is fitted. Provides mower runtime analysis and controls MLS functionality.



TRIMAX PEGASUS S5

The Trimax PEGASUS sets the benchmark in wide area mowing for parks, reserves, airports, racecourses, sports fields, turf farms, and more.

For over 20 years, the Trimax Pegasus has been leading the way in wide-area mowing. Introduced in 2001 as the world's first multi-deck roller mower, the Pegasus is renowned for its robustness and versatility. Its fast spindle speeds and deep mowing decks deliver the highest quality cut and finish every time, and articulating decks provide a consistent cut over light to moderate contours.

The Pegasus S5 builds on the incredible strength, durability, versatility, and efficiency of the previous series to increase machine life and decrease downtime in full-time commercial applications.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PEGASUS SERIES 5 IN YOUR ENVIRONMENT.

| SPECIFICATIONS | 493 | 610 | 722 |
|-----------------------|--------------------------|--------------------------|--------------------------|
| Cutting Width | 4.94m (16' 2") | 6.09m (19' 11") | 7.23m (23' 9") |
| Overall Width | 5.1m (16' 9") | 6.25m (20' 6") | 7.39m (24' 3") |
| Overall Length | 4.65m (15' 3") | 4.65m (15' 3") | 4.65m (15' 3") |
| Transport Width | 2.53m (8' 3¾") | 2.53m (8' 3¾") | 2.53m (8' 3 ¾") |
| Transport Height | 2.62m (8' 7") | 3.2m (10' 6") | 3.8m (12' 6") |
| Cut Height Range | 10 - 110mm (¾" - 4½") | 10 - 110mm (¾" - 4½") | 10 - 110mm (¾" - 4½") |
| No. of Blade Spindles | 9 | 11 | 13 |
| Approx. Weight | 2200kg (4895lbs) | 2440kg (5380lbs) | 2660kg (5865lbs) |
| Min PTO Output | 50hp | 55hp | 60hp |

^{*}Minimum PTO output is a quide only. Requirement varies with the type of work and the terrain

KEY APPLICATIONS.

✓ Municipal & Contractors
✓ Turf
✓ Racecourses
✓ Polo
✓ School & Sport Fields

WHAT'S NEW ON PEGASUS S5

The Pegasus chassis and outrigger arms have been completely redesigned to increase strength without adding unnecessary weight. Larger wheels decrease ground pressure and support a wider range of tyre options. Maintenance-free features have been introduced.



PRODUCT FEATURES.



ROBUST CHASSIS

10% stronger under tough travel conditions, twice the durability in deck lifting and lowering, and a 60% increase in rigidity in the outrigger arms from Pegasus S4.



Adds lights, signage, and beacons to the mower.



SUSPENSION

The new Pegasus S5 Flexiride Torque Suspension System is designed for increased strength and smoother travel at highway speeds.



SAFETY COMPLIANT

Complies with international safety standards and can be used with confidence on the roads and in public spaces.



LOW MAINTENANCE

Zero daily greasing for an 80% reduction in annual grease consumption. Spindles, roller bearings, and auto-belt tensioning are maintenance-free.



ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.



HEIGHT ADJUSTMENT

Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



STAND ON BELT COVERS

Provides safe and easy access to the chassis.



OUIKLIFT

Enables mower decks to be raised without disengaging the PTO to traverse driveways, footpaths and pavements. Now a standard inclusion for all Pegasus models.

*OPTIONAL FEATURES.

✓ 5 YEAR EXTENDED WARRANTY

Increase the standard three-year warranty up to a five-year extended warranty for total peace of mind.

✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing and reduces side channel wear.

TITAN ROLLER BEARING SYSTEM

✓ ELECTRIC BRAKE KIT

& BREAKAWAY

Reduces braking force required by the

✓ ELECTRIC UNLOCK

Unlocks decks electronically from the tractor seat.

✓ MULTI-LIFT SYSTEM

Five different lift functions for mower decks. Now with Drive Protect.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ QUATTRO BLADE SYSTEM

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

✓ SPARE ROAD WHEEL & MOUNT Mounts a spare wheel to the rear

mowing deck. **▼** TOOLBOX & MOUNT

Mounts a toolbox to the mower chassis. **✓** TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.


✓ TURF TYRES

Distributes mower weight for less ground disturbance.

✓ TURF MUDGUARDS

Available for both road tyres and turf



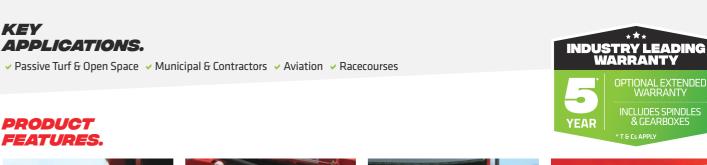

PRODUCT FEATURES.

KEY

755SR

SPECIFICATIONS

Cutting Width

Overall Width

Overall Length

Transport Width

Transport Height

Cut Height Range

No. of Blade

Approx. Weight

Min PTO Output

Spindles

493

4.94m (16' 2")

5.1m (16' 9")

4.65m (15' 3")

2.53m (8' 3¾")

2.62m (8' 7")

20 - 180mm

 $(\frac{7}{8}$ " - $7\frac{1}{7}$ ")



LONG GRASS PERFORMANCE

Designed to mow grass up to 500mm high (depending on conditions) with a cut height range of 20 - 180mm.



LOW MAINTENANCE

Zero daily greasing for an 80% reduction in annual grease consumption. Spindles, roller bearings, and auto-belt tensioning are maintenance-free.



IMPACT PROTECTION

WIDE AREA, OPTIMAL LONG

6.09m (19' 11")

6.25m (20' 6")

4.65m (15' 3")

2.53m (8' 3½")

3.2m (10' 6")

20 - 180mm

2300kg (5071lbs) 2500kg (5512lbs) 2700kg (5952lbs)

 $(\frac{7}{8}$ " - $7\frac{1}{7}$ ")

11

55hp

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

722

7.23m (23' 9")

7.39m (24' 3")

4.65m (15' 3")

2.53m (8' 3 ½")

3.8m (12' 6")

20 - 180mm

 $(\frac{7}{8}$ " - $7\frac{1}{7}$ ")

13

GRASS PERFORMANCE.

Outrigger arms and side channel leading edges have been redesigned for increased impact protection.



Adds lights, signage, and beacons to the mower.



SINGLE ROLLER

Replacing the front roller with castor wheels allows more grass into the cutting chamber, resulting in a clean cut in long grass.



QUIKLIFT

Enables mower decks to be raised without disengaging the PTO to traverse driveways, footpaths and pavements. Now a standard inclusion for all Pegasus models.



AUTOMATIC BELT TENSIONING

Provides more drive to the spindles in long grass applications.



ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.



TITAN ROLLER BEARING SYSTEM

The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



ROBUST CHASSIS

10% stronger under tough travel conditions, twice the durability in deck lifting and lowering, and a 60% increase in rigidity in the outrigger arms from Pegasus S4.



SUSPENSION

The new Pegasus S5 Flexiride Torque Suspension System is designed for increased strength and smoother travel at highway speeds.



SAFETY COMPLIANT

Complies with international safety standards and can be used with confidence on the roads and in public

*OPTIONAL FEATURES.

✓ 5 YEAR EXTENDED WARRANTY

Increase the standard three-year warranty up to a five-year extended warranty for total peace of mind. T&C's apply.

✓ ELECTRIC UNLOCK

Unlocks decks electronically from the tractor seat.

✓ TURF TYRES

ground disturbance.

✓ SPARE ROAD TYRE & MOUNT

Mounts a spare wheel to the rear mowing deck.

✓ ELECTRIC BRAKES WITH BREAKAWAY

Reduces braking force required by the

✓ QUATTRO BLADE SYSTEM

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ TURF MUDGUARDS

Available for both road tyres and turf tvres.

▼ TOOLBAG

Breaker bar, 24mm socket and extension bar for cut height adjustments.

✓ SERVICE KIT

Full set of blades, bolts and belts for a quick routine service.

▼ TOOLBOX & MOUNT

Mounts a toolbox to the mower chassis.



TRIMAX

Since its introduction in 2001, the Trimax Pegasus series has established itself as the benchmark in wide-area mowing where cut quality and presentation are key. The PEGASUS SR builds on the Pegasus's legendary versatility and cut quality by taking its long grass performance to another level.

The Pegasus SR variant allows larger volumes of grass to enter the deck by replacing the front roller with castor wheels, allowing the mower to tackle long grass more effectively.

Containing all the industry leading features included with the Pegasus S5, the Pegasus SR has a range of features that increase machine life, reduce maintenance, and decrease downtime in full-time commercial applications.

Built with industry leading strength and durability, the Pegasus SR is the machine you need for any commercial wide area long grass applications.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PEGASUS SERIES 5 SR IN YOUR ENVIRONMENT.





YEAR

KEY APPLICATIONS.

- ✓ Municipal & Contractors
 ✓ School & Sports Fields
 ✓ Golf & Country Clubs (Roughs)
 ✓ Lifestyle & Estates
- → Racecourses → Horticulture

WHAT'S NEW ON FLAILDEK/FX

Strength and durability are increased from the original FlailDek design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter

has also been added.

PRODUCT FEATURES.



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. Open converter for increased productivity in long grass environments.



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the FlailDek FX to expel debris in a downward direction behind the mower.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



FRONT CASTOR WHEELS

Front castor wheels allow the FlailDek FX to follow ground contours independently from the tractor. The semi-pneumatic tyres are impossible to puncture.



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.



WEAR RESISTANT SKIDS

Wear resistant trailing skids made from abrasion-resistant steel extends bearing life and enables high productivity in the most challenging environments.



NEW IMPROVED ROTOR

*OPTIONAL

✓ SERVICE KIT

FEATURES.

for a quick routine service.

Full set of blades, bolts and belts

Dynamically balanced and designed for durability to withstand everyday use in the toughest mowing environments.

TRIMAX FLAILDEK FX


TRIMAX

The Trimax FLAILDEK FX offers a high-performance alternative to standard factory-fitted rotary mowing attachments.

FlailDek FX has the ability to deliver an exceptionally clean cut and disperse clippings safely and is used by contractors, councils, schools and land owners around the world. A highly versatile mower, FlailDek FX is also able to mulch branches up to 25mm in diameter, mow high grass and using the unique converter flap is suitable for sports fields and other fine turf applications.

The FlailDek FX has been designed to have minimal maintenance requirements and a low total cost of ownership yet deliver maximum reliability.

TALK TO US TODAY ABOUT THE CAPABILITIES OF FLAILDEK FX IN YOUR ENVIRONMENT.

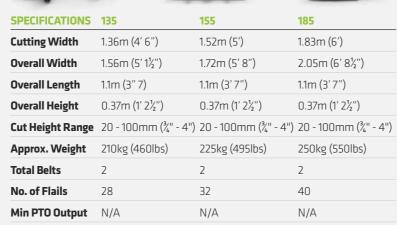

TRIMAX FLAIL TECHNOLOGY

OPERATION.

FOR OUT FRONT

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



The FlailDek processes grass so much better than a Slasher, it mulches and doesn't leave any windrows and it goes into places a slasher can't. It's tough enough to mulch heavy vegetation such as blackberries and saplings. BRANDON PURTELL | Wodonga Golf Club, Wodonga QLD

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION ABOUT THE TRIMAX FLAILDEK FX ONLINE HERE:





TRIMAX EZEEMOW/FX

The EZEEMOW FX is the ideal partner for your compact tractor where versatility and robustness is needed.

With its compact dimension, Ezeemow FX can fit closely to the tractor and manoeuvre into tight corners. Able to mow anything from fine turf to small prunings, vegetation up to 25mm in diameter and high grass, the Ezeemow FX can transform areas into tidy mown lawn in a single pass. This versatility makes the Ezeemow FX ideal for contractors, councils, roadsides, estates, and orchard applications.

The Ezeemow FX has been designed to have minimal maintenance requirements and low total cost of ownership yet deliver maximum reliability.









| SPECIFICATIONS | 135 | 155 | 185 |
|-----------------------|-------------------------|-------------------------|-------------------------|
| Cutting Width | 1.36m (4' 6") | 1.52m (5') | 1.83m (6') |
| Overall Width | 1.56m (5' 1½") | 1.72m (5' 8") | 2.05m (6' 8½") |
| Overall Length | 0.58m (1' 11") | 0.58m (1' 11") | 0.58m (1' 11") |
| Overall Height | 0.37m (1' 2½") | 0.37m (1' 2½") | 0.37m (1' 2½") |
| Cut Height Range | 10 - 100mm (¾" - 4") | 10 - 100mm (¾" - 4") | 10 - 100mm (¾" - 4") |
| Approx. Weight | 180kg (396lbs) | 200kg (440lbs) | 225kg (495lbs) |
| Total Belts | 2 | 2 | 2 |
| No. of Flails | 28 | 32 | 40 |
| Min PTO Output | 17hp | 20hp | 24hp |
| | | | |

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



I've been mowing 30hrs a week for over 28 years and my Ezeemow still has the same gearbox. It produces a beautiful cut and if I had to, I'd replace it with the exact same model..no two ways about it!

STEVE DE BRUIN | Grass Cutting Services, Tauranga NZ

KEY APPLICATIONS.

✓ Municipal & Contractors ✓ Horticulture ✓ Lifestyle & Estates

WHAT'S NEW ON EZEEMOW/FX

Strength and durability are increased from the original Ezeemow design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter, an improved belt tensioning system, and easy height adjustment on the full width roller have also been added.



*OPTIONAL

✓ SERVICE KIT

FEATURES.

Full set of blades, bolts and belts for a quick routine service.

PRODUCT FEATURES.



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. For work in heavy environments, lift converter for increased productivity. The Converter flap is an optional add on.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.

EZEEZMOW **OFFSET** DIAGRAM

ONLY AVAILABLE IN FIXED CENTRE MOUNT OR OFFSET POSITIONS




SAFE CLIPPING DISPERSION


Safety is paramount when mowing in public areas. This is why Trimax has designed the Ezeemow FX to expel debris in a downward direction behind the mower.



NEW IMPROVED ROTOR

Dynamically balanced and designed for durability to withstand everyday use in the toughest mowing









Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.



*RIGHT-HAND OFFSET

Comes standard with a centre mount but is available in a right-hand offset to suit your specific mowing









Extremely versatile, the Trimax WARLORD S3 is bound to dominate any environment you put it in – handling long and short grass, prunings up to 75mm in diameter, turf ribbons and offcuts with ease.

Tame rough patches full of scrub and branches in one pass and leave behind a field of evenly distributed mulch and clippings. Control the coarseness of discharge with Warlord's adjustable rear flap while safely dispersing clippings. The Trimax Warlord is tough and durable, requiring minimal maintenance and simplifying repairs to keep your machine running for years. Spend less time and money keeping your mower operating at 100%.

The Trimax Warlord S3 is a medium duty mower/mulcher suitable for a wide range of applications including sod and turf farming, horticulture, passive turf management, contracting/hire, and land

TALK TO US TODAY ABOUT THE CAPABILITIES OF WARLORD SERIES 3 IN YOUR ENVIRONMENT.







| SPECIFICATIONS | 175 | 205 | 235 |
|-------------------------|--------------------|--------------------|--------------------|
| Cutting Width | 1.74m (5' 9") | 2.04m (6' 8") | 2.34m (7' 8") |
| Overall Width | 2.04m (6' 8") | 2.34m (7' 8") | 2.66m (8' 8") |
| Overall Length | 1.05m (3' 5") | 1.05m (3' 5") | 1.05m (3' 5") |
| Overall Height | 0.55m (1' 10") | 0.55m (1' 10") | 0.55m (1' 10") |
| Cut Height Range | 0 - 70mm (0 - 2¾") | 0 - 70mm (0 - 2¾") | 0 - 70mm (0 - 2¾") |
| Approx. Weight | 690kg (1520lbs) | 750kg (1650lbs) | 810kg (1780lbs) |
| No. of Flails | 24 | 28 | 32 |
| Min PTO Output | 40hp | 44hp | 49hp |
| | | | |

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



We do a lot of roadside work for councils, shires and local government. We use the Warlord where it's too tough for other machines, from my past experience it stands head and shoulders above the rest.

ALAN CHAPEL | AML Turf, Wodonga QLD

KEY APPLICATIONS.

✓ Horticulture ✓ Municipal & Contractors ✓ Turf ✓ School & Sport Fields ✓ Aviation ✓ Racecourses

WHAT'S NEW ON WARLORD S3

The hydraulic side shift and discharge control capabilities are new from the previous Warlord series, further increasing the versatility of the machine.



PRODUCT FEATURES.



HYDRAULIC SIDE SHIFT

The Warlord can be quickly offset to the left or right by up to 500mm. Perfect for transport and manoeuvring around obstacles whilst mowing.




REPLACEABLE INTERNAL LINER

WARLORD **OFFSET**

DIAGRAM HYDRAULIC SIDE SHIFT /

LEFT OFFSETS AVAIL ABLE

A bolt-in 6mm replaceable internal liner increases the life of the body, minimises damage and reduces noise.



Fine mulch is produced with the flap

public spaces. Lift flap open for easy

in the lowest position. Controlling

discharge assists with safety in

HEAVY DUTY ROLLER

DISCHARGE CONTROL

flail servicing.

A robust roller with 8.5mm-thick walls to handle tough applications.



PRUNING GUIDE

Helps direct prunings in and under the mower. Also helps keep debris away from the hydraulic system.



*LEFT HAND OFFSET

OPTIONAL FEATURES.

✓ SERVICE KIT

Warlord comes standard with left hand offset for increased visibility.

Full set of blades, bolts and belts for




a quick routine service.


Skids on Warlord trailing arms prolong mower life in demanding terrain and




REPLACEABLE SKIDS

can be replaced when required.







500mm 852mm

*OPTIONAL

✓ FRONT MOUNT

increased visibility. **→** HEAVY DUTY LINER

high impact zone. **✓** HEAVY DUTY ROLLER

✓ LIGHTING KIT WITH

STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box. **✓ MULCHING COUNTERBLADES** Produces an ultra-fine mulch. **✓ PRUNING RAKES**

Collects prunings into the cutting

Easy access to spare parts and

✓ SAFETY DISPERSION GUARD

FEATURES.

Available in front mount threepoint linkage configuration for

Increases durability in the mower's

Increases roller wall thickness from



TRIMAX FORCE

A brand-new heavy-duty flail mower which has been designed to tackle the toughest commercial applications.

This multitool mower and mulcher is our strongest and most adaptable flail mower yet! With a wide range of options available, it can be configured to suit individual mowing and mulching needs.







| | | | | _ | |
|----------------|------------|------------|------------|------------|------------|
| SPECS | 115 | 145 | 175 | 205 | 235 |
| Cutting Width | 1.15m | 1.44m | 1.73m | 2.02m | 2.3m |
| | (3' 9 ½") | (4' 8 ¾'') | (5' 8 ½") | (6' 7 ¾") | (7' 6 ¾") |
| Overall Width | 1.45m | 1.73m | 2.02m | 2.31m | 2.59m |
| | (4' 8 ½") | (5' 8 ½") | (6' 7 ¾") | (7' 7") | (8' 5 ½") |
| Overall Length | 1.15m | 1.15m | 1.15m | 1.15m | 1.15m |
| | (3' 9 ½") | (3' 9 ½") | (3' 9 ½") | (3' 9 ½") | (3' 9 ½") |
| Overall Height | 0.5m | 0.5m | 0.5m | 0.5m | 0.5m |
| | (1' 7 ¾'') | (1' 7 ¾'') | (1' 7 ¾") | (1' 7 ¾'') | (1' 7 ¾") |
| Cut Height | 0 - 60mm |
| Range | (0 - 2 ¾") | (0 - 2 ¾") | (0 - 2 ¾") | (0 - 2 ¾") | (0 - 2 ¾") |
| Approx. Weight | 590kg | 650kg | 755kg | 815kg | 870kg |
| | (1300lbs) | (1435lbs) | (1665lbs) | (1795lbs) | (1920lbs) |
| Flails | 16 | 20 | 24 | 28 | 32 |
| Min PTO Output | 30hp | 35hp | 40hp | 45hp | 50hp |
| **** DTO 0 : | | | | | |

^{*}Minimum PTO Output is a guide only. Requirement varies with the type of work and the terrain.

KEY APPLICATIONS.

✓ Municipal & Contractors ✓ Horticulture ✓ Aviation ✓ Lifestyle & Estates

WHAT'S DIFFERENT FROM THE WARLORD.

Strength and durability have been increased, including 50% thicker endplates and a newly designed rotor bearing assembly with over 35% higher load capacity than Trimax's previous flail mowers. Zero-maintenance features and a wider array of options have also been introduced.

PRODUCT FEATURES.



MOW AND MULCH WITH **ONE MACHINE**

Mow grass to a fine finish and mulch prunings up to 90mm in diameter with one machine.




A 6mm replaceable internal liner reduces noise and increases durability in the mower's highimpact zones.



LOW MAINTENANCE

and maintenance-free features make regular service quicker and easier than ever.



OFFSET CAPABILITIES

The coarseness of mulch can be controlled by adjusting the height of the rear flap.



The Force can come with a leftor right-hand offset with an additional 500mm of hydraulic side shift. Available on the 175, greasing. 205, and 235 models.



MAINTENANCE-FREE **ROLLER BEARINGS**

New highly-rated sealed roller bearing stacks require no regular

Recommended for all mowers operating in public spaces, the safety dispersion guard ensures that debris exits the cutting chamber safely.

✓ SERVICE KIT

chamber.

✓ STORAGE BOX

Full set of blades, bolts and belts for a quick routine service.



AUTO BELT TENSIONING

DISCHARGE CONTROL

The belt system is equipped with automatic tensioners to optimise drive to the rotor without requiring manual adjustments.



SMOOTH EXTERNAL PROFILE

New internal rotor bearings create a smooth external profile and provide a closer cut around



HEAVY-DUTY SKIDS

Heavy-duty wear skids on the mower trailing arms prolong mower life in demanding terrain and are easily removed or replaced.



OPTIONAL PRODUCT FEATURES.



✓ 5 YEAR EXTENDED WARRANTY

Increase the standard threeyear warranty up to a five-year extended warranty for total peace of mind. T&C's apply.



✓ ELECTRIC UNLOCK

Replaces the standard in-cab transport lock release rope with an electric actuator. This is operated by a push button



ROTARY MOWERS.

✓ LEAF MULCH KIT

Baffle system for mulching branches & leaves while mowing.



✓ NEXABLADES

Scientifically designed for highend turf giving a superior cut &



SERVICE KIT

Keeping parts on hand for quick routine service.



TOOLBOX & MOUNT

Mounts a toolbox to the mower



presentation; protecting side channels in high-wear applications. FRONT MOUNT

MUDGUARDS, WITH

LIGHTS & CHAINS

Roadside operations or road

✓ QUATTRO BLADES

STORAGE BOX

✓ TURF MUD GUARDS

Available for both road tyres and

HEAVY DUTY LINER

Increase the life of your

wear applications.

replaceable internal liner by

three times with a heavy-duty

internal liner, suitable for high-

for quick adjustments.

per metre.

turf tyres.

Achieving excellent presentation

and grass health with more cuts

travel between operation sites.

ANTI-WEAR SKIDS

ANTI-BOUNCE/

ncreasing mowing speed



✓ ELECTRIC BRAKES

Roadside operations or road travel between operation sites.



LIGHTING KIT & STORAGEBRACKET

Mounting kit with storage bracket, reflector triangle &



MULTI-LIFT SYSTEM WITH DRIVE PROTECT

Complete mowing deck control for areas with varied clearance



SPARE WHEEL & MOUNT

Mounts a spare wheel to the rear mowing deck.



TOOLBAG

Easy height adjustment in the



TURF TYRES

Decreasing mower impact on turf through tread pattern and width: ideal when mower stavs at a single site.

HEAVY DUTY ROLLER Upgrade from the 5mm thick

roller to a roller with 11mm wall

COUNTERBLADES

An internal liner with built-

in blades for extra material

processing. Can produce ultra-

thickness. Suitable for more

demanding applications.

MUI CHING

fine mulch.



FRONT MOUNT

Increased visibility during operation. Suitable for tractors with front PTO drive only.



HYDRAULIC SIDE SHIFT

Position directly behind the tractor or quickly offset for easy transport and increased naneuverability.



OFFSET

routine service.

Machine is offset to increase ver-the-shoulder visibility



Mounting kit with storage

LIGHTING KIT &

STORAGE BRACKET

bracket, reflector triangle &



PRUNING RAKES

Collects prunings into the cutting chamber for more efficient mulching.



SAFEY DISPERSION **GUARD**

ensures that debris exits the cutting chamber safely.



The Safety Dispersion Guard



✓ STORAGE BOX

Keeping tools and parts on hand for quick adjustments.



MANUFACTURED IN THE UK.

OVER 75% OF TRIMAX MOWERS FOR EUROPEAN AND UK CUSTOMERS AREBUILT IN THE UK.

As the leading supplier of mowers to local authorities and contractors, many customers now have a fleet of multiple Trimax mowers, confident in a brand that they know will not let them down.

Our Northampton facility, established in 2015, is equipped to build over 75% of the market-leading Trimax range in the UK.

We are proud to build on our local sourcing and manufacturing efforts to strengthen our ability to supply quickly and meet customer expectations.



Trimax Global Headquaters - Tauranga, New Zealand

ROTARY MOWERS.





FLAILDEK / FX



PROCUT/S5





FLAIL MOWERS.

EZEEMOW/FX

WANT TO KNOW MORE? FIND US ONLINE.

THE TRIMAX WEBSITE.

The Trimax website contains more information, photos, and videos of our products and features.


TRIMAXMOWERS.CO.UK



OR USE THIS OR CODE

THE TRIMAX RESOURCE CENTRE.

Easily accessed from the main website. the **Trimax Resource** Centre provides everything you need to easily service and maintain your Trimax mower. Best of all. it's completely free.

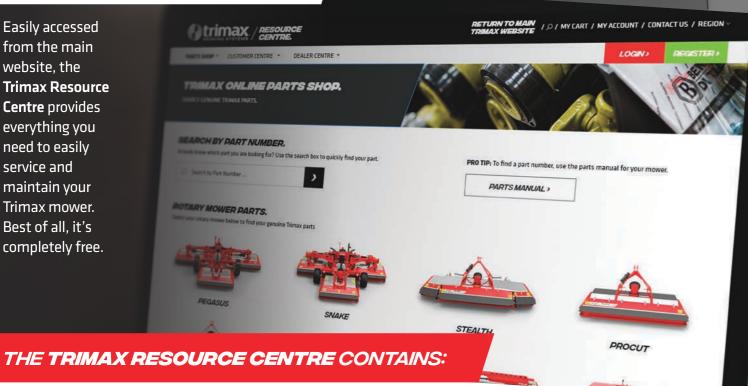

THE TRIMAX **CUSTOMER CENTRE.**

- Watch step-by-step service and setup videos.
- Download maintenance checklists.
- Access the operator manual and parts manual for your mower.
- Read instructions for installing Trimax Genuine Spare Parts.



THE TRIMAX PARTS SHOP.

- Browse the catalogue of Trimax Genuine Parts and Service Kits.
- Quickly find common parts.
- Now with improved search functionality find exactly the part you need.



WHEN DOWNTIME IS NOT AN OPTION, SAVE MONEY ON EQUIPMENT THAT LASTS. YOU CAN COUNT ON TRIMAX.

2 LOW TOTAL **ILL** COST OF OWNERSHIP.

- Long commercial life, with mowers 35 years old and counting still in the field.
- > Reduced time, labour, and fuel requirements for
- Affordable aftermarket parts guaranteed to meet Trimax quality standards.

RELIABLE SUPPORT.

- > Same day dispatch for all urgent orders.
- > Knowledgeable local service staff and easy-toaccess online resources.
- Industry-leading 3-year warranty which includes spindles and gearboxes.

PRODUCTIVITY-BOOSTING EFFICIENCY.

- > Less time in the shop with minimised and simplified service requirements.
- Designed for/tested in the harshest environments for maximum uptime in normal commercial operations.
- > A wide range of available options to customise for your specific needs.

TRIMAX BUILDS MOWERS THAT LAST, AND WE BACK THAT UP BY OFFERING THE LONGEST AND **MOST COMPREHENSIVE** WARRANTY IN THE INDUSTRY.

All Trimax mowers come with a standard 12-month warranty with the opportunity to extend another 24 months by registering new machines online

- V COVERS SPINDLES
- ∨ COVERS GEARBOXES
- *▼ ABSOLUTELY FREE*



TRIMAX MOWING SYSTEMS

40 Lower Farm Road, Moulton Park, Northampton NN3 6XF, UK **P** +44 0 1933 652 235 / **E** info@trimaxmowers.co.uk

FOR MOWER ENQUIRIES

P +44 0 1933 652 235 / **E** info@trimaxmowers.co.uk

FOR PARTS ENQUIRIES

P +44 0 1933 652 246 / **E** parts@trimaxmowers.co.uk

