

HOLDER C 65 TC

The efficient and manoeuvrable implement carrier C 65 TC is an all-rounder for year-round use. Its 2-person cab increases the possible applications and working comfort.



Order no. **8.330-191.0**


Technical data

| | | |
|------------------------------|-----------------|--------------------|
| Drive | | Diesel |
| Drive- performance | kW / hp | 48 / 67 |
| Cubic capacity | cm ³ | 2615 |
| Cylinder | | 4 |
| Emissions standard | | STAGE V |
| Fuel tank | l | 65 |
| max. Speed | km/h | 40 |
| Working speed | km/h | 40 |
| Permissible axle load, front | | 2300 |
| Permissible axle load, rear | kg | 2300 |
| Climbing ability | % | 65 |
| Noise level (in cab) | dB(A) | 83 |
| Load | kg | max. 1411 |
| Wheelbase | mm | 1870 |
| Diesel particulate filter | | 1 |
| Total permissible weight | kg | 3500 |
| Weight without accessories | kg | 2600 |
| Dimensions (L × W × H) | mm | 4200 × 1500 × 2300 |



High variability for vehicle types, construction and expansion options

- Flexible use and large selection of powerful implements.
- Two standard attachment areas (front/rear) and a 3rd attachment area for articulated implements.
- Quick-change system enables 1 person to change implements without the need for any tools.

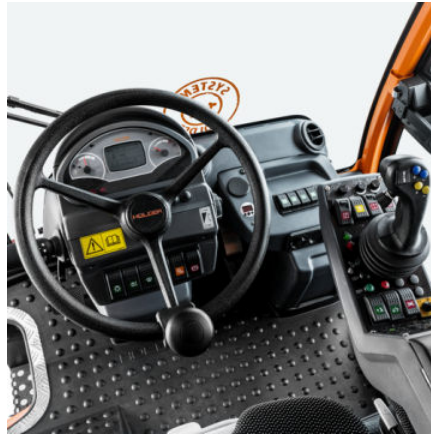

Ergonomic and comfortable cab

- Optimal room climate in all weathers with air-conditioning, heating, and rotating air nozzles.
- 2-person cab with proper space for passenger.
- 360° panoramic view for unobstructed view of working area and safe manoeuvring.



Very easy servicing

- Hydraulically tiltable engine compartment cover allows tilting with articulated machine.
- Tanks can be swivelled out on both sides for easy cleaning and service access.