



Bobcat®

COMPACT TRACK LOADERS
T450



One Tough Animal®

T450 — SPECIFICATIONS

Machine Rating

Rated operating capacity (no more than 35% of Tipping Load)	665 kg
Tipping load (ISO 14397-1)	1900 kg
Pump capacity	63.00 L/min
System relief at quick couplers	22.4-23.1 MPa
Max. travel speed	11.7 km/h
Max. travel speed (high range – optional)	17.7 km/h

Engine

Make / Model	Bobcat / D24
Fuel	Diesel
Cooling	Liquid
Power at 2600 RPM (SAE J1995):	46.2 kW
Torque at 1800 RPM (SAE J1995 Gross):	225.0 Nm
Number of cylinders	4
Displacement	2393 cm ³
Fuel tank	65.50 L

Weights

Operating weight	2789 kg
Shipping weight	2520 kg

Controls

Vehicle steering	Direction and speed controlled by two hand levers or optional joysticks
Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS) or Selectable Joystick Control (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

Standard Features


Cushion suspension seat	Work lights, front and rear
Auxiliary hydraulics: variable flow/maximum flow	Parking brake
Bob-Tach™ frame	Seat belt
Bobcat Interlock Control System (BICS)	Seat bar
Deluxe operator cab* Includes interior cab foam, side, top and rear windows, Deluxe wire harness, dome light, electrical power port, cup holder, storage place and horn ¹	Turbo-charger with approved spark arrestor
Front door with windshield wiper	Tracks — rubber — 300 mm
Instrumentation	CE certification
Noise reduction kit	Warranty: 24 months or 2000 hours, whichever occurs first
Lift arm support	

1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I

Options

Deluxe instrument panel	Back-up alarm
Power Bob-Tach™	Beacon
Cab enclosure with heating	Air ride seat with 2 point seat belt
Cab enclosure with HVAC	Radio
Advanced Control System (ACS)	Road kit
Selectable Joystick Controls (SJC)	Two speed
Air ride seat with 3 point seat belt	Bucket Position Valve

Dimensions

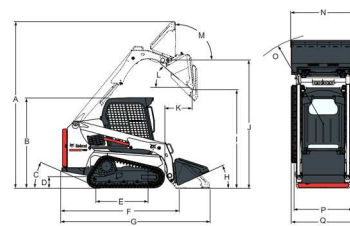

(A)	3604.0 mm	(J)	2781.0 mm
(B)	1976.0 mm	(K)	597.0 mm
(C)	28.0°	(L)	40.0°
(D)	213.0 mm	(M)	91.0°
(E)	1275.0 mm	(N)	1422.0 mm
(F)	2499.0 mm	(N*)	1575.0 mm
(G)	3216.0 mm	(O)	1979.0 mm
(H)	26.0°	(P)	1097.0 mm
(I)	2129.0 mm	(Q)	1397.0 mm

Attachments

Angle Brooms	Low Profile Buckets
Auger Accessories	Miscellaneous
Augers	Mowers
Backhoes	Pallet Fork Accessories
Bale Forks	Pallet Forks, Hydraulic
Box Blades	Root Grapples
Breaker Accessories	Scarifiers
Breakers	Scrapers
Brushcat™ Rotary Cutters	Skeleton Buckets
Brush Saws	Snow & Light Material Buckets
Combination Buckets	Snow Blades
Concrete Mixers	Snow Pushers
Construction / Industrial Buckets	Snow V-Blades
Diggers	Sod Layers
Dozer Blades	Soil Conditioners
Dumping Hoppers	Spreaders
Fertilizer and Grain Buckets	Sweepers
Flail Cutters	Tillers
General Purpose (GP)	Tilt-Tatch
Bucket	Utility Forks
Graders	Utility Frames
Grapples, Industrial	Vibratory Rollers
Landplanes	Whisker Brooms
Landscape Rakes	Wood Chippers
Laser Equipment	

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Bobcat units may show other than standard equipment.



Bobcat is a Doosan Company.

Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries.
©2019 Bobcat Company. All Rights Reserved.



Bobcat®

www.bobcat.com

